


SS16V



Tensioning System

Tensioning the blade is a simple procedure; by adjusting the tensioning knob at the rear of the machine, the correct tension for any kind of blade can be set with minimal effort.

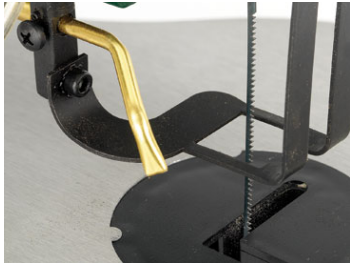


Adjustable Dust Blower & Safety Clamp

The built in dust blower automatically clears waste from the cutting area. This is an invaluable feature, ensuring optimum visibility while working. The hold down clamp eliminates risk of the workpiece being thrown upwards whilst the blade is moving, which greatly reduces the risk of material breakage as well as damage to fingers.



Integral Work Light

The workpiece can be illuminated from any angle thanks to the support arm, to eliminate troublesome shadows and help achieve the most accurate cut.

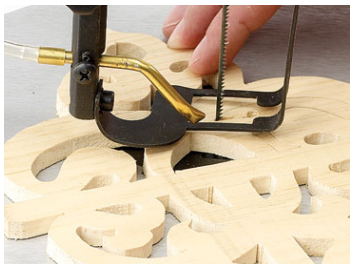

Ideal for Intricate Fretwork

Thanks to the smooth action of the blade and solid build quality, highly intricate and accurate work can be carried out without the nuisance of excess vibration.



Tilting Table

The table tilts up to 45°, allowing for endless possibilities, from creating snug fitting veneers and intarsia work to the compound cutting techniques often used in model making.



Smooth and Responsive Variable Speed

Blade speed is changed with ease using the conveniently placed control knob at the front of the machine.



Dust Extraction Port

An easily accessible port at the front of the machine allows for removal of dust using a suitable extraction device.