


## Impact socket 1/2", long type - 231/4XL6p

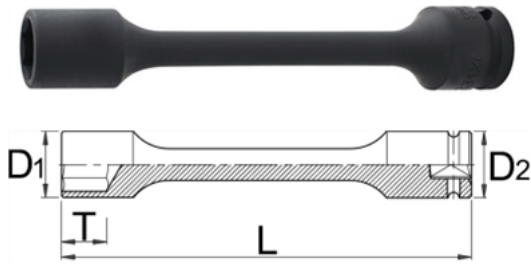

### Description

- material: chrome molybdenum
- surface finish: phosphated to standard DIN 12476
- drop forged, entirely hardened and tempered

### Technical Data

Barcode	mm	D1	D2	L	T	Weight	Material	Surface	Drop Forged
618955	8	15	25	180	10	204	1E	5	0
618956	9	16	25	150	12	209	1E	5	0
618957	10	17.5	25	150	12	217	1E	5	0
618958	11	18.5	25	150	12	219	1E	5	0
618959	12	20	25	150	12	210	1E	5	0
618960	13	21	25	150	12	231	1E	5	0
618961	14	22.5	25	150	12	241	1E	5	0
618962	15	23.5	30	150	12	290	1E	5	0
618963	16	25	30	150	13	301	1E	5	0
618964	17	26	30	150	13	304	1E	5	0
618965	18	27.5	30	150	13	313	1E	5	0
618966	19	28.5	30	150	13	316	1E	5	0
618967	20	30	30	150	13	326	1E	5	0
618968	21	31	30	150	13	338	1E	5	0
618969	22	32	30	150	14	408	1E	5	0
618970	23	34	30	150	14	437	1E	5	0
618971	24	35	30	150	15	444	1E	5	0
618972	25	36	30	150	15	439	1E	5	0
618973	26	38	30	150	16	545	1E	5	0
618974	27	38.5	30	150	17	541	1E	5	0

### Packaging data

Barcode	mm	Retail tool packaging				Transport package				
		A	B	C	Weight	A1	B1	C1	Weight	
618955	8	265	80	25	204	1	-	-	-	-
618956	9	265	80	25	209	1	-	-	-	-
618957	10	255	80	25	217	1	-	-	-	-
618958	11	265	80	25	219	1	-	-	-	-
618959	12	265	80	25	210	1	-	-	-	-
618960	13	265	80	25	231	1	-	-	-	-
618961	14	255	80	25	241	1	-	-	-	-
618962	15	265	80	30	290	1	-	-	-	-
618963	16	265	80	30	301	1	-	-	-	-
618964	17	265	80	30	304	1	-	-	-	-
618965	18	275	80	30	313	1	-	-	-	-
618966	19	265	80	30	316	1	-	-	-	-
618967	20	265	80	30	326	1	-	-	-	-
618968	21	275	80	31	338	1	-	-	-	-
618969	22	275	80	32	408	1	-	-	-	-
618970	23	275	80	34	437	1	-	-	-	-
618971	24	265	80	35	444	1	-	-	-	-
618972	25	275	80	36	439	1	-	-	-	-
618973	26	275	80	38	545	1	-	-	-	-
618974	27	285	80	38.5	541	1	-	-	-	-