


Polizor pneumatic unghiular - 1518

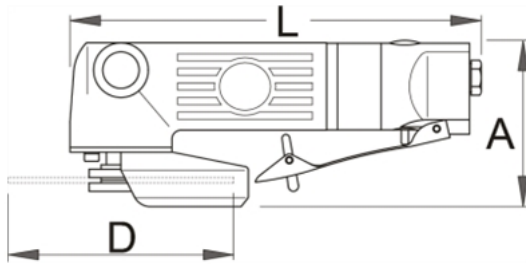

Descriere

- viteza de rotatie 11000 rotatii/minut
- Presiunea maxima de aer comprimat: 6, 2 Bar
- consum de aer comprimat 170 l/min
- Racord de aer 1/4"
-




Avantaje:

- maner interschimbabil
- levier de siguranta care previne pornirea accidentala
-



Utilizare

- protectia partilor in miscare
- folosit de asemenea in locuri inguste
- scula industriala
- curatarea sudurii
- curatarea betonului si a suprafetelor de pereti
- curatirea suprafetelor de lemn
- inlaturarea vopselelor si a lacurilor
- inlaturarea ruginii
- taiere profile si table
- alti utilizatori casnici

Date Tehnice

617730	L	A	D				0
617730	230	90	125	2175	F	1	0

Date de ambalare

617730	Mod de reambalare.				Ambalare pentru transport.					
	L	A	B	C			A1	B1	C1	
617730	230	145	245	100	2245	1	-	-	-	-