


## Ciocan pneumatic reversibil 1.1/2" - 1596

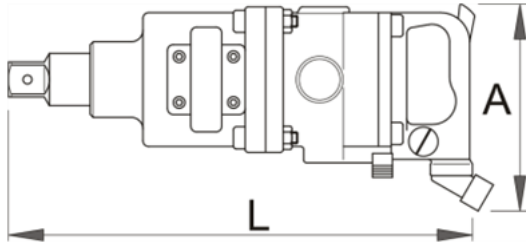

### Descriere

- viteza de rotatie 3000 rot/min
- moment de torsiune max. 3388 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- consum de aer comprimat 410 l/min
- Racord de aer 1/2"
- dimensiunea maxima a surubului (piulitei) M 45

### Avantaje:

- moment de torsiune controlat
- insurubare rapida
- o diversitate de utilizari

### Utilizare

- industria auto
- industria aerospatiale
- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

### Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

### Date Tehnice

617690	1.1/2"	A	L	Nm	kg	F	1	0
617690	1.1/2"	145	450	3388	17800	F	1	0

### Date de ambalare

617690	Mod de reambalare.				Ambalare pentru transport.				
	A	A	B	C	kg	1	A1	B1	C1
617690	145	270	550	165	17870	1	-	-	-