


Clesti combinati - 405/4P

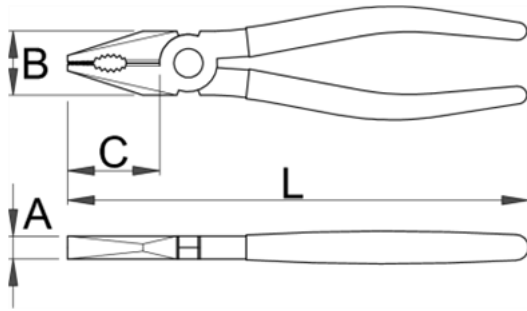

Descriere

- material:compozitie speciala pentru calire revenire
- tratat complet
- partile taietoare tratate prin inductie
- cap vopsit
- acoperire:fosfatate
- manere de plastic
- in conformitate cu standardul ISO 5746

Date Tehnice

| Barcode | L | B | C | A | Weight | Material | Color | ISO |
|---------|-----|----|----|------|--------|----------|-------|-----|
| 608678 | 160 | 24 | 35 | 9.5 | 171 | B | 10 | 0 |
| 608679 | 180 | 27 | 38 | 10 | 230 | B | 10 | 0 |
| 608680 | 200 | 29 | 41 | 10.5 | 274 | B | 10 | 0 |

capacitatea de taiere (10N=1kg)

| Barcode | L | max 1600 N/mm ² Ø | max 650 N/mm ² Ø |
|---------|-----|------------------------------|-----------------------------|
| 608678 | 160 | 1,6 | 2,0 |
| 608679 | 180 | 1,8 | 2,5 |
| 608680 | 200 | 2,0 | 2,5 |

Date de ambalare

| Barcode | Mod de reambalare. | | | | | Ambalare pentru transport. | | | | |
|---------|--------------------|-----|----|----|--------|----------------------------|-----|-----|----|--------|
| | L | A | B | C | Weight | Material | A1 | B1 | C1 | Weight |
| 608678 | 160 | 220 | 58 | 20 | 171 | 4 | 114 | 291 | 39 | 772 |
| 608679 | 180 | 240 | 58 | 20 | 236 | 4 | 114 | 291 | 39 | 1010 |
| 608680 | 200 | 250 | 58 | 20 | 288 | 4 | 114 | 291 | 39 | 1188 |