


Clesti combinati izolati la 1000 V - 406/1VDEDP

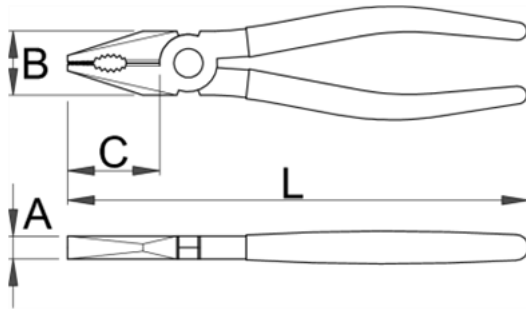

Descriere

- material:compozitie speciala pentru calire revenire
- tratat complet
- partile taietoare tratate prin inductie
- cap polizat
- finisare:cromat in conformitate cu standardul EN12540
- in conformitate cu standardul ISO 5746 si EN 60900:2004

Avantaje:

- manerele izolate cu doua straturi de culori diferite care permit o protectie suplimentara

Important!

- daca al doilea strat devine vizibil inlocuiti scula VDE cu una noua

Date Tehnice

Barcode	L	B	C	A	Weight	Color	Material	Other
619177	140	23	32	8	157	B	1	0
619178	160	24	35	9.5	219	B	1	0
619179	180	27	38	10	269	B	1	0
619180	200	29	41	10.5	321	B	1	0
619181	220	32	47	11	376	B	-	0

capacitatea de taiere (10N=1kg)

Barcode	L	max 1600 N/mm ² Øf	max 650 N/mm ² Øf
619177	140	1,6	2,0
619178	160	1,6	2,0
619179	180	1,8	2,5
619180	200	2,0	2,5
619181	220	2,0	3,0

Date de ambalare

Barcode	Mod de reambalare.					Ambalare pentru transport.				
	L	A	B	C	Weight	Hand	A1	B1	C1	Weight
619177	140	210	67	30	156	4	75	308	60	706
619178	160	220	68	31	225	4	104	277	68	1081
619179	180	240	65	30	266	4	104	277	68	1145
619180	200	250	64	30	332	4	104	277	68	1409
619181	220	300	67	30	385	4	145	358	48	1665