


Clesti cu tais lateral izolat la 1000 V - 461/1VDE

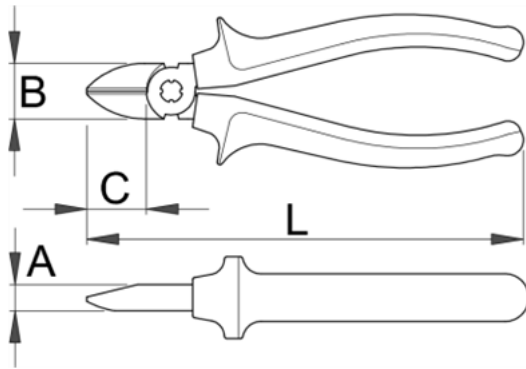

Descriere

- material:compozitie speciala pentru calire revenire
- tratat complet
- partile taietoare tratate prin inductie
- cap polizat
- finisare:cromat in conformitate cu standardul EN12540
- maner de plastic pentru conditii grele
- in conformitate cu standardul ISO 5749 si EN 60900:2004

Date Tehnice

| Barcode | L | B | A | C | Weight | Material | Accessories | Other |
|---------|-----|------|-----|----|--------|----------|-------------|-------|
| 605012 | 140 | 19 | 9.5 | 18 | 169 | B | 1 | 0 |
| 605013 | 160 | 22.5 | 10 | 22 | 214 | B | 1 | 0 |

capacitatea de taiere (10N=1kg)

| Barcode | L | max 1600 N/mm ² Øf | max 650 N/mm ² Øf |
|---------|-----|-------------------------------|------------------------------|
| 605012 | 140 | 1,6 | 2,0 |
| 605013 | 160 | 1,6 | 2,5 |

Date de ambalare

| Barcode | Mod de reambalare. | | | | | Ambalare pentru transport. | | | | |
|---------|--------------------|-----|----|----|--------|----------------------------|----|-----|----|--------|
| | L | A | B | C | Weight | Hand | A1 | B1 | C1 | Weight |
| 605012 | 140 | 270 | 58 | 30 | 175 | 4 | 90 | 330 | 84 | 825 |
| 605013 | 160 | 240 | 58 | 30 | 215 | 4 | 84 | 318 | 63 | 926 |