


## Clesti tais lateral izolat la 1000 V - 461/1VDEBI

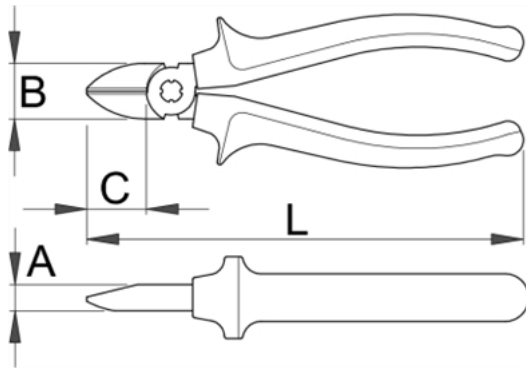

### Descriere

- material:compozitie speciala pentru calire revenire
- tratat complet
- partile taietoare tratate prin inductie
- cap polizat
- finisare:cromat in conformitate cu standardul EN12540
- manere bimaterial pentru conditii grele
- in conformitate cu standardul ISO 5749 si EN 60900:2004

### Date Tehnice

Barcode	L	B	A	C	Weight	Material	Accessories	Other
610426	140	19	9.5	18	169	B	1	0
610427	160	22.5	10	22	214	B	1	0

### capacitatea de taiere (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Øf	max 650 N/mm <sup>2</sup> Øf
610426	140	1,6	2,0
610427	160	1,6	2,5

### Date de ambalare

Barcode	Mod de reambalare.					Ambalare pentru transport.				
	L	A	B	C	Weight	Hand	A1	B1	C1	Weight
610426	140	230	60	31	180	4	84	318	63	774
610427	160	240	63	32	220	4	84	318	63	954