


Clesti tais lateral izolat la 1000 V - 461/1VDEDP

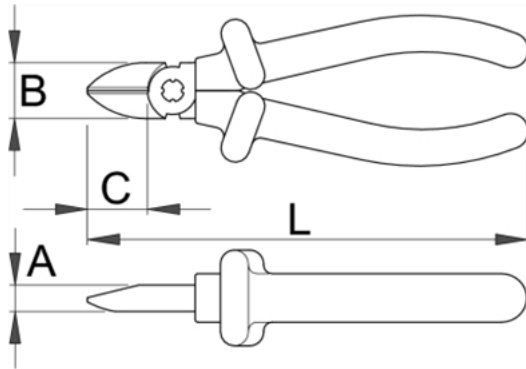

Descriere

- material:compozitie speciala pentru calire revenire
- tratat complet
- partile taietoare tratate prin inductie
- cap polizat
- finisare:cromat in conformitate cu standardul EN12540
- in conformitate cu standardul ISO 5749 si EN 60900:2004

Avantaje:

- manerele izolate cu doua straturi de culori diferite care permit o protectie suplimentara

Important!

- daca al doilea strat devine vizibil inlocuiti scula VDE cu una noua

Date Tehnice

Barcode	L	B	A	C	Weight	Material	Accessories	Other
619193	140	19	9,5	18	174	B	1	0
619194	160	22,5	10	22	224	B	1	0

capacitatea de taiere (10N=1kg)

Barcode	L	max 1600 N/mm ² Øf	max 650 N/mm ² Øf
619193	140	1,6	2,0
619194	160	1,6	2,5

Date de ambalare

Barcode	Mod de reambalare.					Ambalare pentru transport.				
	L	A	B	C	Weight	Hand	A1	B1	C1	Weight
619193	140	230	65	31	189	4	84	318	63	804
619194	160	230	60	30	237	4	104	277	68	1029